


# 5V-CRIMP

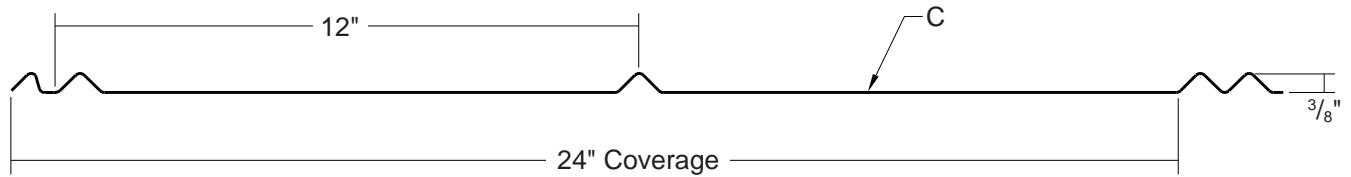

ARCHITECTURAL  
RESIDENTIAL  
PANEL

DIRECT  
FASTEN


24"  
COVERAGE

MINIMUM  
3:12 SLOPE

SOLID WOOD  
SUBSTRATE

## PANEL OVERVIEW

- ▶ Finishes: MS Colorfast45® and Acrylic Coated Galvalume®
- ▶ Gauges: 26ga standard, 24ga optional
- ▶ 24" panel coverage,  $\frac{3}{8}$ " rib height
- ▶ Exposed fastened panel, traditional "V" rib
- ▶ Applies over plywood substrate with 30 pound felt underlayment
- ▶ 3:12 slope minimum

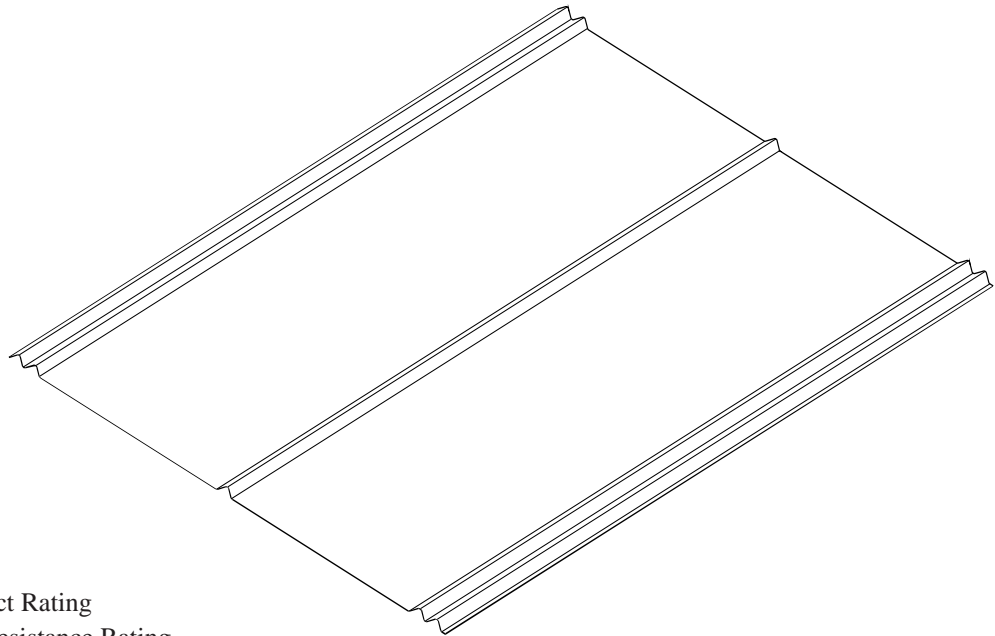

## TESTING


- ▶ UL 2218, Class 4 Impact Rating
- ▶ UL 790, Class A Fire Resistance Rating
- ▶ Florida Building Code Approved 5807.4, 9107.1, 8131.1
- ▶ Miami-Dade County Approved 05-0919.01, 07-0731.09
- ▶ UL 580, Class 90 Wind Uplift Construction #579 over 1/2" Plywood
- ▶ UL 580, Class 90 Wind Uplift Construction #453 over 5/8" Plywood

**metal sales**  
manufacturing corporation




# 5V-CRIMP

## ATTACHMENT DETAIL

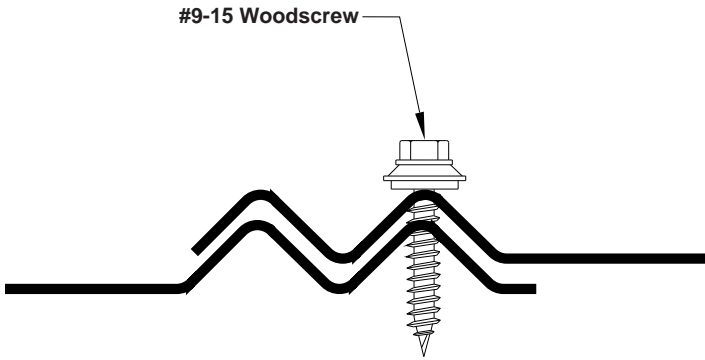


## FASTENING PATTERNS

### IN THE FIELD:

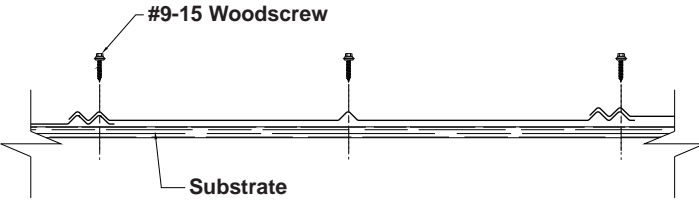

### AT THE EAVE:

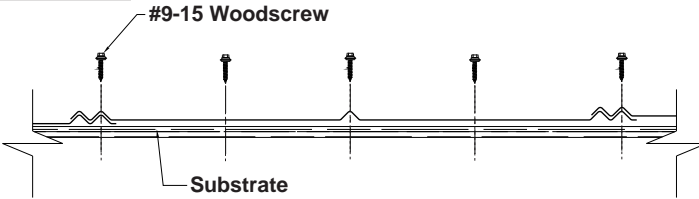

\*Contact Metal Sales Technical Services for Dade County attachment requirements.

## GENERAL INFORMATION

### ► Slope

The minimum recommended slope for 5V-Crimp roofing panel is 3:12.

### ► Substructure

The recommended substrate is 5/8" plywood with a 30 pound felt moisture barrier. To avoid panel distortion use a properly aligned and uniform substructure.

*NOTE: 5V-Crimp roof panels are not recommended for use over open structural framing.*

### ► Length

Minimum factory cut length is 5'-0". Maximum recommended panel length is 45'-0". Longer panels require additional consideration in packaging, shipping, and erection. Please consult Metal Sales for recommendations.

### ► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

*NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.*

### ► Availability

*Finishes: Acrylic Coated Galvalume® and MS Colorfast45®  
Gauges: 26ga and 24ga*

## SECTION PROPERTIES

## ALLOWABLE UNIFORM LIVE LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression				Bottom in Compression				Outward Uplift (Stress) Load					
				lxx In <sup>4</sup> /ft		Sxx In <sup>3</sup> /ft		lxx In <sup>4</sup> /ft		Sxx In <sup>3</sup> /ft		0'-6"	1'-0"	1'-6"	2'-0"	2'-6"	3'-0"
				lxx	Sxx	lxx	Sxx	lxx	Sxx	lxx	Sxx						
26	24"	50	0.77	0.0025	0.0069	0.0015	0.0054	101	89	60	34	22	15				
24	24"	50	1.02	0.0030	0.0089	0.0020	0.0073	101	89	60	34	22	15				

- Theoretical section properties have been calculated per AISI 2001 "Specification for the Design of Cold-formed Steel Structural Members." lxx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear, deflection, and applicable testing when available. Allowable load considers the worst case of 3 and 4 equal span conditions. Allowable load does not address web crippling or fasteners/support connection and panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.

**metal sales**  
manufacturing corporation



Kent, WA (800) 431-3470  
Temple, TX (800) 543-4415  
Longmont, CO (800) 289-7663  
Antioch, TN (800) 251-8508  
Woodland, CA (800) 759-6019  
Rogers, MN (800) 328-9316  
Spokane, WA (800) 572-6565

Jefferson, OH (800) 321-5833  
Rock Island, IL (800) 747-1206  
Sellersburg, IN (800) 999-7777  
Jacksonville, FL (800) 394-4419  
Orwigsburg, PA (800) 544-2577  
Independence, MO (800) 747-0012  
Fontana, CA (800) 782-7953

Anchorage, AK (866) 640-7663  
Bay City, MI (888) 777-7640  
Detroit Lakes, MN (888) 594-1394  
Mocksville, NC (800) 228-6119

©MS12805V/11-2007