


# PBU-PANEL

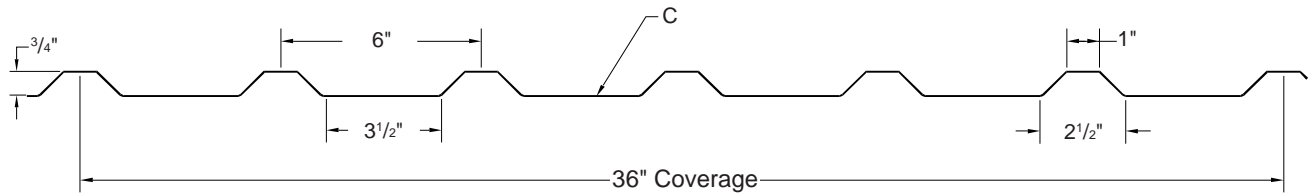

ARCHITECTURAL  
COMMERCIAL  
INDUSTRIAL  
PANEL

DIRECT  
FASTEN


36"  
COVERAGE

MINIMUM  
1:12 SLOPE

OPEN FRAMING OR  
SOLID SUBSTRATE

## PANEL OVERVIEW

- ▶ Finishes: Kynar 500 (PVDF), MS Colorfast45<sup>®</sup>, and Acrylic Coated Galvalume<sup>®</sup>
- ▶ Gauges: 26ga and 24ga standard, 22ga optional
- ▶ 36" panel coverage,  $\frac{3}{4}$ " rib height
- ▶ Applies over open framing or solid substrate
- ▶ Exposed fastened metal building panel
- ▶ Trapezoidal rib on 6" centers
- ▶ Minimum roof slope 1:12

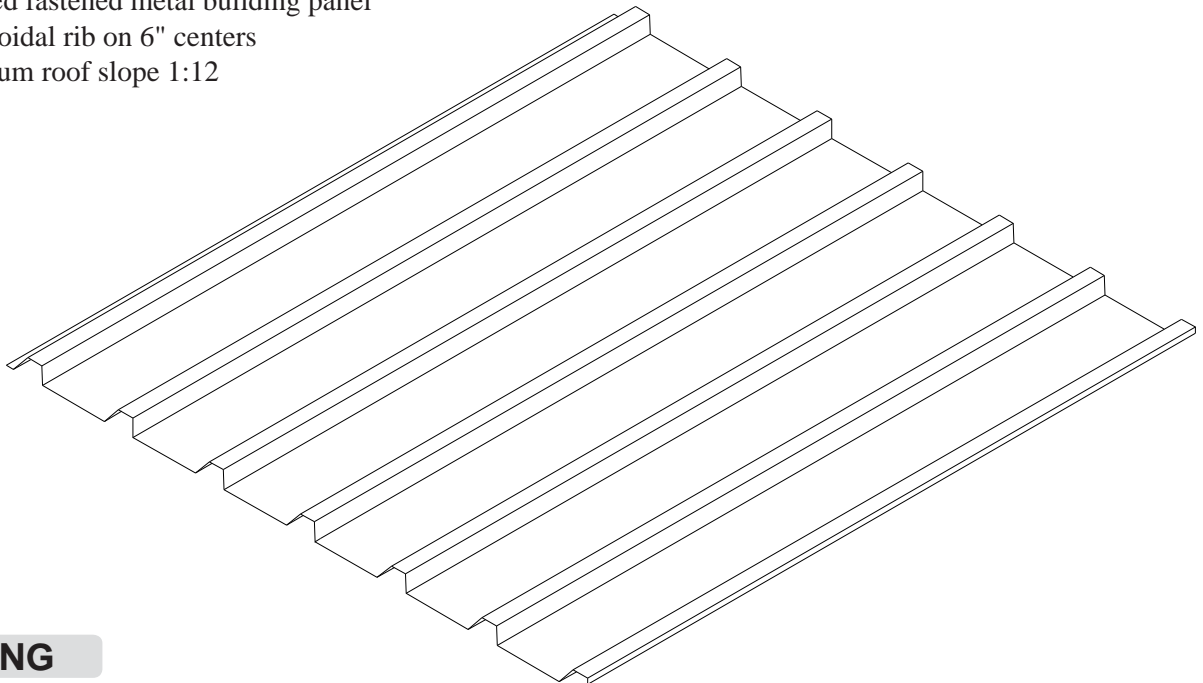

## TESTING


- ▶ UL 2218, Class 4 Impact Resistance
- ▶ UL 790, Class A Fire Resistance Rating
- ▶ UL 580, Class 90 Wind Uplift Construction Number 39

**metal sales**  
manufacturing corporation




# PBU-PANEL

## ATTACHMENT DETAIL

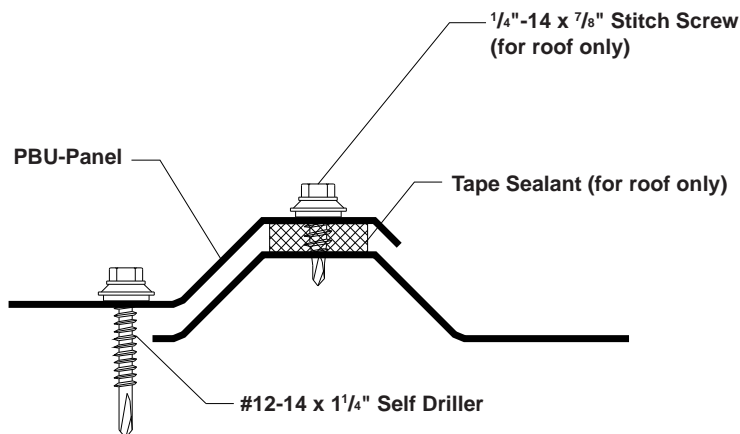

## FASTENING PATTERN

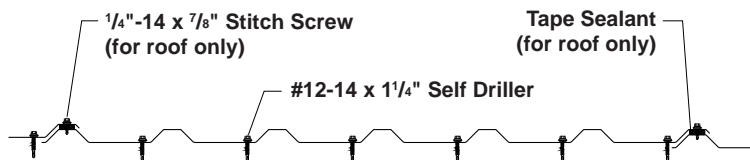

## GENERAL INFORMATION

### ► Slope

The minimum recommended slope for PBU-Panel is 1:12. Metal Sales recommends that in all roof applications sealants be used on all sidelaps with stitch screw 1'-0" on center.

### ► Substructure

PBU-Panel is designed to be utilized over open structural framing, but can easily be used with a solid substrate. To avoid panel distortion, use a properly aligned and uniform substructure.

### ► Coverage

PBU-Panel are available in 3/4" rib height with a coverage width of 36".

### ► Length

Minimum factory cut length is 5'-0". Maximum recommended panel length is 45'-0". Longer panels require additional consideration in packaging, shipping, and erection. Please consult Metal Sales for recommendations.

### ► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

*NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.*

### ► Availability

*Finishes: Acrylic Coated Galvalume®, MS Colorfast45®, or various Kynar 500 (PVDF) colors.*  
*Gauges: 26ga and 24ga standard, 22ga optional*

## SECTION PROPERTIES

## ALLOWABLE UNIFORM LIVE LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression		Bottom in Compression		Inward (Gravity / Deflection) Load							Outward Uplift (Stress) Load					
				Ixx In <sup>4</sup> /ft	Sxx In <sup>3</sup> /ft	Ixx In <sup>4</sup> /ft	Sxx In <sup>3</sup> /ft	2'	3'	4'	5'	6'	7'	2'	3'	4'	5'	6'	7'	
																				2'
26	36"	80	0.89	0.0187	0.0349	0.0130	0.0308	209	94	48	25	14	9	313	142	80	52	36	26	
24	36"	50	1.15	0.0273	0.0524	0.0190	0.0482	272	123	70	36	21	13	392	178	101	65	45	33	
22	36"	50	1.48	0.0367	0.0741	0.0267	0.0676	379	172	95	49	28	18	551	251	142	91	64	47	

- Theoretical section properties have been calculated per AISI 2001 "Specification for the Design of Cold-formed Steel Structural Members." Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear, deflection, and applicable testing when available. Allowable load considers the worst case of 3 and 4 equal span conditions. Allowable load does not address web crippling or fasteners/support connection and panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.



Kent, WA (800) 431-3470  
 Temple, TX (800) 543-4415  
 Longmont, CO (800) 289-7663  
 Antioch, TN (800) 251-8508  
 Woodland, CA (800) 759-6019  
 Rogers, MN (800) 328-9316  
 Spokane, WA (800) 572-6565

Jefferson, OH (800) 321-5833  
 Rock Island, IL (800) 747-1206  
 Sellersburg, IN (800) 999-7777  
 Jacksonville, FL (800) 394-4419  
 Orwigsburg, PA (800) 544-2577  
 Independence, MO (800) 747-0012  
 Fontana, CA (800) 782-7953

Anchorage, AK (866) 640-7663  
 Bay City, MI (888) 777-7640  
 Detroit Lakes, MN (888) 594-1394  
 Mocksville, NC (800) 228-6119