






MS COLORFAST45® PAINT SYSTEM



Bright White (39) ☆



White (30) ☆




Light Stone (63) ☆



Mocha Tan (22) ☆



Brown (12) ☆




Ash Grey (25) ☆



Zinc Grey (29) ☆



Charcoal (17) ☆



Taupe (74) ☆



Burnished Slate (49) ☆




Forest Green (26) ☆




Fern Green (07) ☆



Ocean Blue (35) ☆



Burgundy (15) ☆



Black (06) ☆



Red (24) ☆



Dark Red (46) ☆
Upcharge will apply



Patriot Red (73) ☆
Upcharge will apply



Native Copper (190) ☆
Upcharge will apply



Galvalume (41) ☆
Non-Painted Finish 25 Year Warranty





www.metalsales.us.com

45 Year Paint Warranty



☆ All Colors Meet or Exceed
Steep Slope ENERGY STAR®
Requirements

Color selections are close representations but are limited by processing and viewing conditions.
Actual samples are available upon request. For all specific warranty, application, installation,
and technical information regarding these products contact your local sales representative.

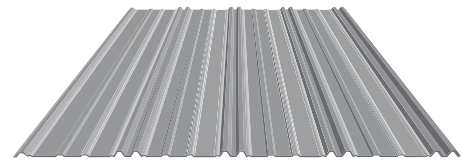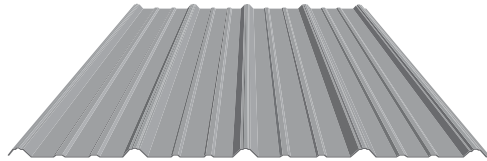

- 29 Gauge
- 36" panel coverage
- Minimum roof slope 3:12
- Exposed fastener, low profile
- Installs over open framing or solid substrate

29 GAUGE FLASHINGS*

<p>UNIVERSAL RIDGE (14") Length 10'-6"</p>	<p>GABLE TRIM Length 10'-6"</p>	<p>EAVE MOLDING Length 10'-6"</p>	<p>"J" CHANNEL Length 10'-6"</p>
<p>UNIVERSAL SIDEWALL Length 10'-6"</p>	<p>UNIVERSAL ENDWALL Length 10'-6"</p>	<p>PITCH BREAK Length 10'-6"</p>	<p>OUTSIDE CORNER Length 10'-6"</p>
<p>BASE MOLDING Length 10'-6"</p>	<p>DRIP CAP Length 10'-6"</p>	<p>ANGLE BASE Length 10'-6"</p>	<p>INSIDE CORNER Length 10'-6"</p>
<p>VALLEY Length 10'-6"</p>	<p>DOOR POST TRIM Length 10'-6"</p>	<p>DOUBLE ANGLE Length 10'-6"</p>	<p>MINI ANGLE Length 10'-6"</p>
<p>OVERHEAD DOOR TRIM Length 10'-6"</p>	<p>POST TRIM Length 10'-6"</p>	<p>SOFFIT TRIM Length 10'-6"</p>	<p>UNIVERSAL GAMBREL Length 10'-6"</p>

*Some common flashings are shown
Contact your Metal Sales Branch for other available standard flashings