


# DELTA RIB

Condensed  
Technical  
Reference

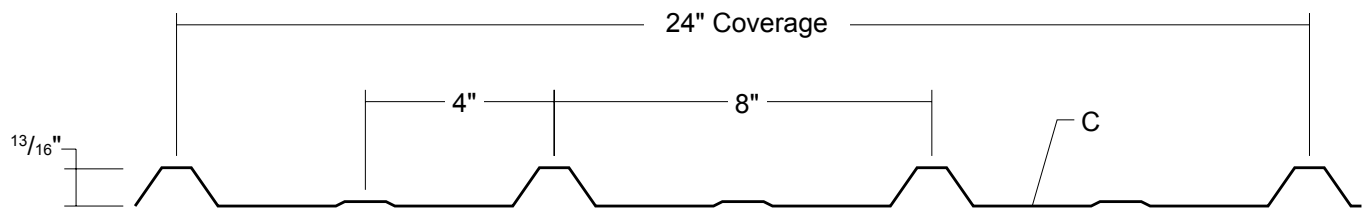

AGRICULTURAL  
RESIDENTIAL  
PANEL

DIRECT  
FASTENED


24"  
COVERAGE

MINIMUM  
SLOPE  
3:12

OPEN FRAMING OR  
SOLID SUBSTRATE

## PANEL OVERVIEW

- ▶ Finishes: MS Colorfast45<sup>®</sup> and Acrylic-Coated Galvalume<sup>®</sup>
- ▶ Corrosion Protection: AZ55 per ASTM A 792 for unpainted Galvalume<sup>®</sup>  
AZ50 per ASTM A 792 for painted Galvalume<sup>®</sup>  
G90 per ASTM A 653 for Galvanized
- ▶ Gauges: 26 ga standard; 29 ga and 24 ga optional
- ▶ 24" panel coverage, <sup>13</sup>/<sub>16</sub>" rib height
- ▶ Panel Length: Minimum: 5'; Maximum: 40' recommended
- ▶ Trapezoidal ribs on 8" centers
- ▶ Applies to open framing or solid substrate
- ▶ Minimum roof slope: 3:12
- ▶ Residential and Agricultural applications
- ▶ Lightweight for easy handling
- ▶ Economical and distinctive appearance

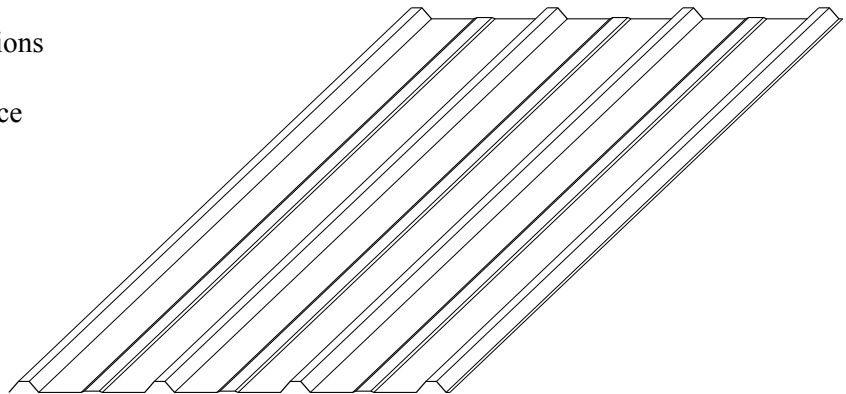

## TESTING AND APPROVALS

- ▶ UL 2218 Impact Resistance - Class 4
- ▶ UL 790 Fire Resistance Rating - Class A, per building code
- ▶ UL 263 Fire Resistance Rating - per assembly

**ms metal sales**<sup>™</sup>  
manufacturing corporation

