


Image II™ Panel

Metal Sales Manufacturing Corporation



Architectural Standing Seam Metal Roof Panel


- ▶ Choose from MS Colorfast45® , PVDF or Acrylic Coated Galvalume®
- ▶ 26 ga. standard, 24 ga. available at select branches
- ▶ Available in a wide variety of colors
- ▶ 45 Year Paint Finish Warranty
- ▶ Installs over a solid substrate
- ▶ Minimum roof slope 3:12

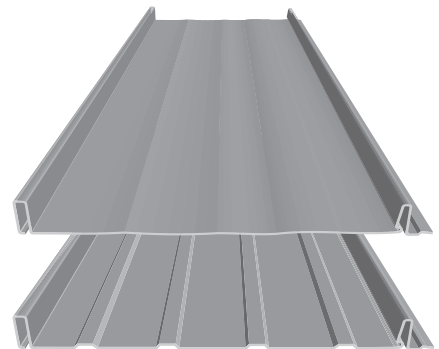

800.406.7387
metalsales.us.com

MS Metal Sales™

PANEL PROFILES*

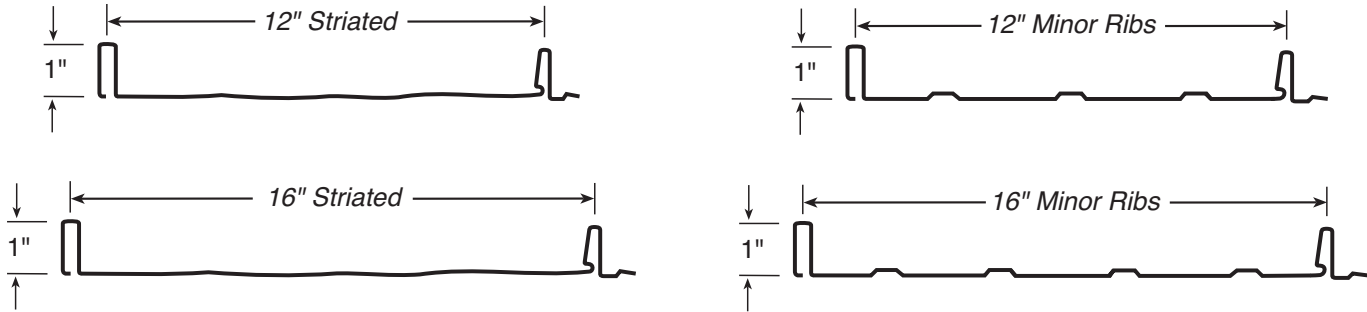

*Not all profiles are available at all branches. Fastening leg may vary slightly from what's shown.

PANEL INFORMATION

- ▶ 12" and 16" panel coverage
- ▶ Gauges: 26 ga. and 24 ga.
- ▶ Minimum roof slope: 3:12
- ▶ Concealed fasteners help enhance the beauty of any project

TESTING AND APPROVALS

- ▷ UL 2218 Impact Resistance - Class 4
- ▷ UL 790 Fire Resistance Rating - Class A, per building code
- ▷ UL 263 Fire Resistance Rating - per assembly
- ▷ UL 580 Uplift Resistance - Class 90 Construction: #529
- ▷ Texas Windstorm - Evaluation RC-162 and RC-399
- ▷ 2023 FBC Approvals - FL11560.4 and FL14645.10
- ▷ Miami-Dade County, Florida NOA 23-0711.05 expires 8/8/2028
- ▷ ICC Evaluation Report - ESR-2385

GENERAL INFORMATION

▶ **Features:** Image II panels will not warp, split, crack or curl and are impervious to mildew, rot, termites and pests. Installation over solid substrate is a snap.

▶ **Substructure:** Image II is designed to be utilized over a solid substrate. To avoid panel distortion, use a properly aligned and uniform substructure.

▶ **Length:** Minimum factory cut length is 5'-0". Maximum recommended panel length is 30'-0". Longer panels require additional considerations in packaging, shipping and erection. Please consult Metal Sales for recommendations.

▶ **Fasteners:** The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

▶ **Finishes:** Acrylic Coated Galvalume®, MS Colorfast45® or various PVDF colors.

For all specific warranty, application, installation and technical information regarding these products, contact your representative.

LOAD TABLE

SECTION PROPERTIES								ALLOWABLE UNIFORM LOADS psf (3 or More Equal Spans)			
Ga.	Width in	Yield ksi	Weight psf	Top In Compression		Bottom In Compression		Outward Load			
				Ixx in ⁴ /ft	Sxx in ³ /ft	Ixx in ⁴ /ft	Sxx in ³ /ft	0'-6"	1'-0"	1'-6"	2'-0"
26	16	50	0.92	0.0165	0.0174	0.0165	0.0177	103	96	90	84
24	16	50	1.19	0.0210	0.0226	0.0210	0.0226	103	96	90	84

1. Theoretical section properties have been calculated per AISI 2016 'North American Specification for the Design of Cold-Formed Steel Structural Members'. Ixx and Sxx are effective section properties for deflection and bending.
2. Allowable load is calculated in accordance with AISI 2016 specifications considering bending, shear, combined bending & shear and deflection. Allowable load does not address web crippling, fasteners, support material or load testing. Allowable load considers the three or more equal spans condition. Panel weight is not considered.
3. Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
4. Allowable loads do not include a 1/3 stress increase for wind.

1013 ©MS(1865) / 2-2024

Metal Sales Manufacturing Corporation

Anchorage, AK: 866.640.7663
 Bay City, MI: 888.777.7640
 Deer Lake, PA: 800.544.2577
 Denver, CO: 800.289.7663
 Detroit Lakes, MN: 888.594.1394

Fontana, CA: 800.782.7953
 Fort Smith, AR: 877.452.3915
 Independence, MO: 800.747.0012
 Jacksonville, FL: 800.394.4419
 Jefferson, OH: 800.321.5833

Mocksville, NC: 800.228.6119
 Nashville, TN: 800.251.8508
 Rock Island, IL: 800.747.1206
 Rogers, MN: 800.328.9316
 Kelso, WA: 800.431.3470

metalsales.us.com

Sellersburg, IN: 800.999.7777
 Sioux Falls, SD: 888.299.0024
 Spokane, WA: 800.572.6565
 Temple, TX: 800.543.4415
 Woodland, CA: 800.759.6019