


PVDF Paint System



Linen White (81)

SR = 0.73	TE = 0.86	SRI = 89
-----------	-----------	----------



Khaki (88)

SR = 0.35	TE = 0.87	SRI = 37
-----------	-----------	----------



Classic Green (66)

SR = 0.32	TE = 0.86	SRI = 33
-----------	-----------	----------



Zinc Grey (29)

SR = 0.41	TE = 0.86	SRI = 45
-----------	-----------	----------



Burnished Slate (49)

SR = 0.30	TE = 0.85	SRI = 30
-----------	-----------	----------




Ocean Blue (35)

SR = 0.29	TE = 0.86	SRI = 29
-----------	-----------	----------



Patriot Red (73)


SR = 0.46	TE = 0.86	SRI = 52
-----------	-----------	----------



Acrylic Coated Galvalume® (41)²

SR = 0.67	TE = 0.14	SRI = 56
-----------	-----------	----------

MS Colorfast45® Paint System



Polar White (80)

SR = 0.58	TE = 0.87	SRI = 68
-----------	-----------	----------



White (30)

SR = 0.57	TE = 0.88	SRI = 67
-----------	-----------	----------




Light Stone (63)

SR = 0.50	TE = 0.88	SRI = 58
-----------	-----------	----------



Mocha Tan (22)

SR = 0.52	TE = 0.87	SRI = 60
-----------	-----------	----------



Brown (12)

SR = 0.31	TE = 0.87	SRI = 32
-----------	-----------	----------



Burgundy (15)

SR = 0.25	TE = 0.87	SRI = 24
-----------	-----------	----------




Patriot Red (73)

SR = 0.35	TE = 0.88	SRI = 38
-----------	-----------	----------



Red (24)

SR = 0.30	TE = 0.86	SRI = 30
-----------	-----------	----------



Burnished Slate (49)

SR = 0.31	TE = 0.87	SRI = 32
-----------	-----------	----------



Ocean Blue (35)

SR = 0.30	TE = 0.88	SRI = 31
-----------	-----------	----------



Hawaiian Blue (70)

SR = 0.32	TE = 0.87	SRI = 33
-----------	-----------	----------



Charcoal (17)

SR = 0.30	TE = 0.87	SRI = 31
-----------	-----------	----------



Ash Grey (25)

SR = 0.37	TE = 0.88	SRI = 40
-----------	-----------	----------



Forest Green (26)

SR = 0.27	TE = 0.87	SRI = 27
-----------	-----------	----------



Patina Green (58)

SR = 0.29	TE = 0.86	SRI = 29
-----------	-----------	----------



Black (06)

SR = 0.30	TE = 0.88	SRI = 31
-----------	-----------	----------

(Color Code) • SR = Initial Solar Reflectance • TE = Thermal Emittance • SRI = Solar Reflectance Index

² Non-Painted Finish

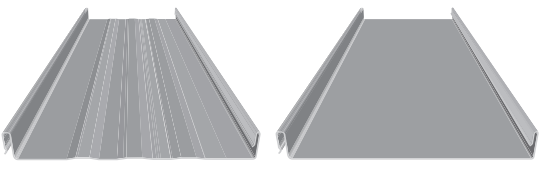
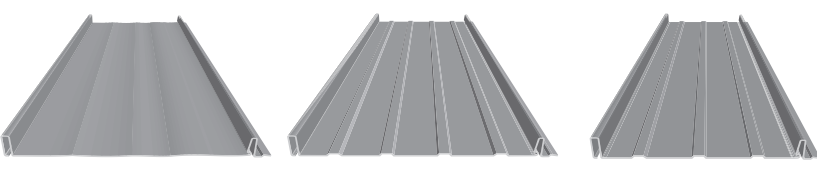
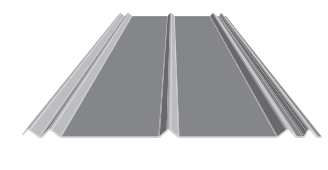
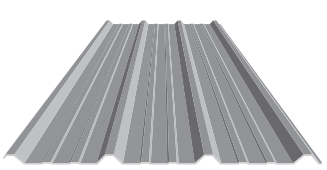
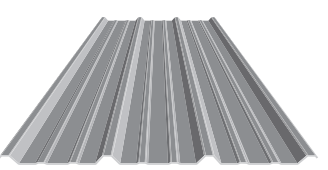
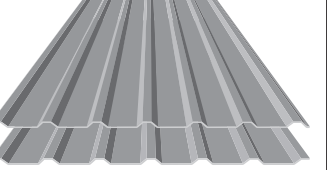
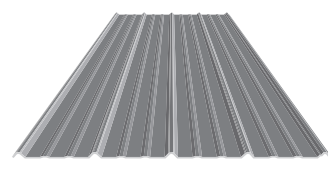
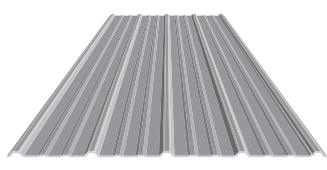
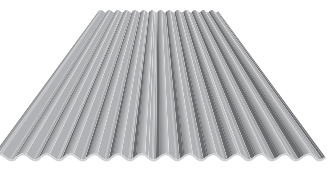
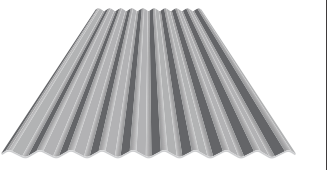
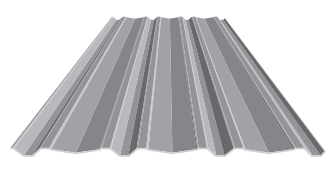

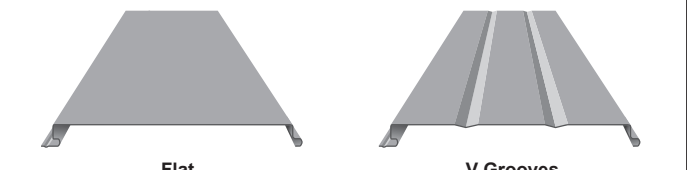


Color selections are close representations but are limited by printing and viewing conditions. Actual samples are available by request.



Visit metalsales.us.com for valuable tools and resources

COMMON 26 GAUGE PANEL PROFILES (COVERAGE)

Vertical Seam (12" & 16")  <p style="text-align: center;">Striated Flat Pan</p>		Image II (12" & 16")  <p style="text-align: center;">Striated 16" Minor Rib 12" Minor Rib</p>		
5V-Crimp (24") 	PBR-Panel (36") 	R-Panel (36") 	PBU-Panel/U-Panel (36") 	
Classic Rib® (36") 	Pro-Panel II® (36") 	7/8" Corrugated (varies) 	2.5" Corrugated (varies) 	
Span-Line 36A (36") 	Mini-Batten (12" & 16") 	Soffit Panel (12")  <p style="text-align: center;">Flat V-Grooves</p>		

Panels are also available in other gauges, please inquire. Not all colors and gauges are stocked at all branches. Color samples are close representations but are limited by processing and viewing conditions. Actual samples are available by request. For all specific warranty, application, installation and technical information regarding these products, contact your sales representative.

PVDF PAINT PERFORMANCE

Salt Spray Resistance

ASTM B 117	1,000 Hours	Creep from scribe no more than 1/8", no blisters
------------	-------------	--------------------------------------------------

Humidity Resistance

ASTM D 2247	2,000 Hours	No blisters, cracking or peeling
-------------	-------------	----------------------------------

Abrasion Resistance

ASTM D 968	Method A	65 ± 5 liters/mil falling sand
------------	----------	--------------------------------

Chalk Resistance

ASTM D 4214	2,000 Hours	No chalking greater #8 rating
-------------	-------------	-------------------------------

MS COLORFAST45® PAINT PERFORMANCE

Salt Spray Resistance

ASTM B 117	1,000 Hours	Creep from scribe no more than 1/8", no blisters
------------	-------------	--------------------------------------------------

Humidity Resistance

ASTM D 2247	1,200 Hours	No blisters, cracking or peeling
-------------	-------------	----------------------------------

Abrasion Resistance

ASTM D 968	Method A	30 liters/mil falling sand
------------	----------	----------------------------

Chalk Resistance

ASTM D 4214	2,000 Hours	No chalking greater #8 rating
-------------	-------------	-------------------------------

3-22e 1095