


CN88-168 CF WALL

Condensed
Technical
Reference

CONTEMPRA SERIES™

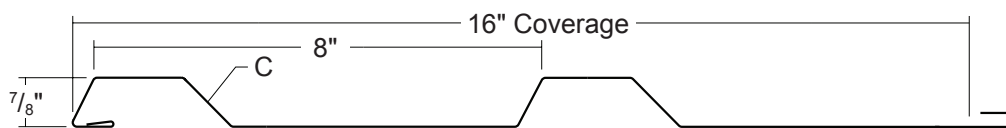

ARCHITECTURAL
COMMERCIAL
INDUSTRIAL
PANEL

CONCEALED
FASTENED



16"
COVERAGE

WALL AND
LINER PANEL

OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finish: Standard: PVDF and Acrylic-Coated Galvalume®
Optional: multi-pass Kynar 500® and Fluoropon® PURE
- ▶ Corrosion Protection: AZ50 per ASTM A 792 for Painted Galvalume®
AZ55 per ASTM A 792 for Acrylic-Coated Galvalume®
G90 per ASTM A 653 for Painted Galvanized
- ▶ Gauges: 24 ga standard; 22 ga and 20 ga optional
- ▶ 16" panel coverage, 7/8" panel height
- ▶ Assymmetrical ribs on 8" centers
- ▶ Clip-attached, concealed-fastened panel system
- ▶ Panel Length: 5' minimum, 30' maximum
- ▶ Panels can be installed horizontally or vertically
- ▶ Panels are interchangeable for accent effects
- ▶ Use on single-skin or field-assembled wall systems

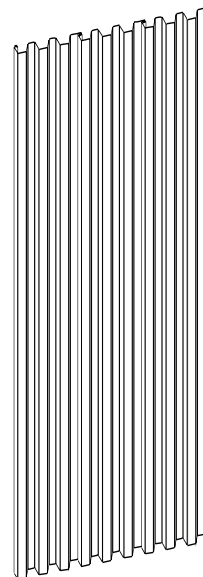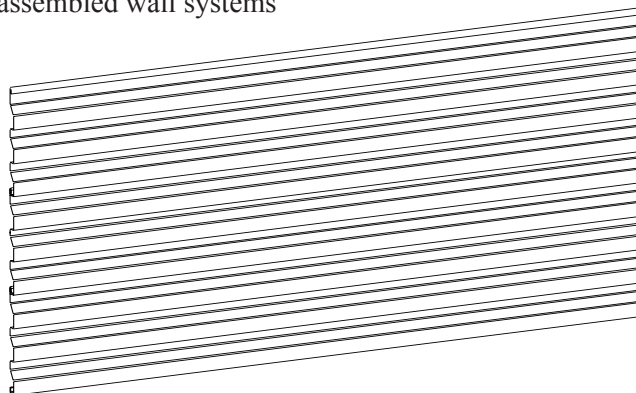

TESTING


- ▶ ASTM E 283 Air Leakage
- ▶ ASTM E 331 Water Penetration
- ▶ ASTM E 330 Load Test
- ▶ ASTM E 1592 Load Test

ms metal sales™
manufacturing corporation

CN88-168 CF WALL

**Condensed
Technical
Reference**

ATTACHMENT DETAIL

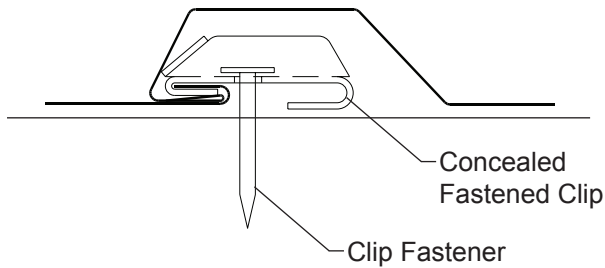

FASTENING INFORMATION


- Concealed Fastened Clip is 2-1/4" x 1-3/4" x 3/4", from 16 ga, G90 material with 2 fastener holes.
- Clip Fasteners should be driven just to contact between fastener head / clip / panel / support. Beyond contact, the clip can crush the open hem of the panel and make engagement of the next panel difficult. Overdriven fasteners will cause panel distortions.
- Fasteners should extend 1/2" or more past the inside face of the support material for steel and wood sheathing support materials.
- Clip Fasteners:
 - Attaching to Wood:
 - #12-11 Low Profile Wood Screw
 - Attaching to Steel:
 - < 18 ga: 1/4"-13 Deck Screw
 - ≥ 18 ga, ≤ 12 ga: #10-16 Pancake Head Drill
 - > 12 ga: 1/4"-14 Self Driller, No Washer

INSTALLATION DIRECTION


Horizontally-oriented panels must be installed from the bottom to the top.

Vertically-oriented panels may be installed from the right-to-left or left-to-right.

Left-to-Right Installation of Vertically-Oriented Panels



Right-to-Left Installation of Vertically-Oriented Panels



SECTION PROPERTIES

ALLOWABLE UNIFORM LOADS, psf For various clip spacings

| Ga | Width in | Yield ksi | Weight psf | SECTION PROPERTIES | | | | ALLOWABLE UNIFORM LOADS, psf For various clip spacings | | | | | | | | | |
|----|-------------|--------------|---------------|----------------------------|----------------------------|----------------------------|----------------------------|---|----|----|----|----|--------------|----|----|----|----|
| | | | | Top In Compression | | Bottom In Compression | | Inward Load | | | | | Outward Load | | | | |
| | | | | Ixx in ⁴ /ft | Sxx in ³ /ft | Ixx in ⁴ /ft | Sxx in ³ /ft | 2' | 3' | 4' | 5' | 6' | 2' | 3' | 4' | 5' | 6' |
| 24 | 16 | 50 | 1.17 | 0.0315 | 0.0456 | 0.0248 | 0.0544 | 120 | 96 | 71 | 47 | 23 | 89 | 73 | 57 | 41 | 26 |
| 22 | 16 | 50 | 1.53 | 0.0450 | 0.0669 | 0.0360 | 0.0726 | 120 | 96 | 71 | 47 | 23 | 89 | 73 | 57 | 41 | 26 |
| 20 | 16 | 33 | 1.86 | 0.0623 | 0.0951 | 0.0495 | 0.0912 | 120 | 96 | 71 | 47 | 23 | 89 | 73 | 57 | 41 | 26 |

1. Theoretical section properties have been calculated per AISI 2016 'North American Specification for the Design of Cold-Formed Steel Structural Members'. Ixx and Sxx are effective section properties for deflection and bending.
2. Allowable load is calculated in accordance with AISI 2016 specifications considering bending, shear, combined bending & shear, deflection and load testing of comparable profiles on 16 ga girls. Allowable load does not consider other support conditions such as, web crippling, fasteners or support material. Panel weight is not considered.
3. Allowable load considers the 3 or more equal spans condition.
4. Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
5. Allowable loads do not include a 1/3 stress increase for wind.

ms metal sales™
manufacturing corporation

metalsales.us.com

Anchorage, AK 866.640.7663
Bay City, MI 888.777.7640
Deer Lake, PA 800.544.2577
Denver, CO 800.289.7663

Detroit Lakes, MN 888.594.1394
Fontana, CA 800.782.7953
Fort Smith, AR 877.452.3915
Independence, MO 800.747.0012

Jacksonville, FL 800.394.4419
Jefferson, OH 800.321.5833
Mocksville, NC 800.228.6119
Nashville, TN 800.251.8508
Rock Island, IL 800.747.1206
Rogers, MN 800.328.9316

Seattle, WA 800.431.3470
Sellersburg, IN 800.999.7777
Sioux Falls, SD 888.299.0024
Spokane, WA 800.572.6565
Temple, TX 800.543.4415
Woodland, CA 800.759.6019