




MS Colorfast45® Paint System



Bright White (39)



White (30)



Ivory (28)



Light Stone (63)



Mocha Tan (22)



Carlsbad Canyon (10)



Taupe (74)




Brown (12)



Burnished Slate (49)



Black (06)



Ash Grey (25)



Zinc Grey (29)



Charcoal (17)



Ocean Blue (35)



Hawaiian Blue (70)



Red (24)



Patriot Red (73) *



Burgundy (15)



Forest Green (26)



Fern Green (07) Low Gloss



Shale Green (R7)



Native Copper (190) *




Galvanized (00)
Non-Painted Finish - No Warranty

MS Crinkle Finish Paint System




Ash Grey (25) *




Bright White (39) *



Light Stone (63) *




Taupe (74) *




Charcoal (17) *




Forest Green (26) *




Red (24) *




Burgundy (15) *



Brown (12) *



Burnished Slate (49) *



Black (06) *


Due to the unique texture these colors will not perfectly match and are not interchangeable with other similar Metal Sales colors. This is a unique appearance coating that needs to be seen and felt. Actual samples are available by request.

Color selections are close representations but are limited by processing and viewing conditions. Actual samples are available upon request. For all specific warranty, application, installation, and technical information regarding these products contact your local sales representative.

* Premium Color

metalsales.us.com

CLASSIC RIB® PANEL

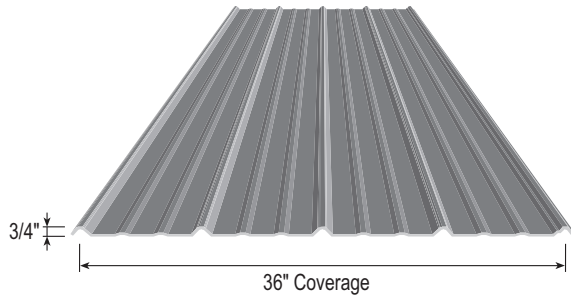

GENERAL INFORMATION

Minimum Slope: 3:12

Substructure:

Installs over Open Framing or Solid substrate.

Information:

Exposed direct-fastened roof and wall panel.

Testing & Approvals:

UL 263 Fire Resistance Rating

UL 580, Class 90 Wind Uplift

UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

ASTM E 455 Diaphragm Test

ASTM E 564-95 Diaphragm Test


Texas Department of Insurance Evaluation Report

ICC Evaluation Report

Miami-Dade County Approved

2017 FBC Approved

PRO-PANEL II® PANEL

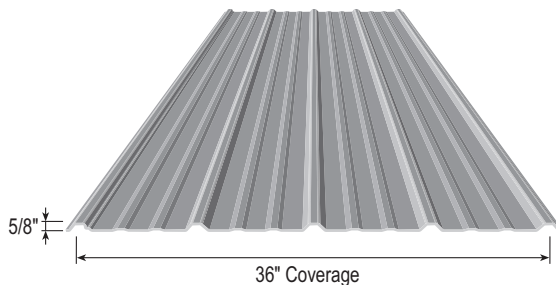

GENERAL INFORMATION

Minimum Slope: 3:12

Substructure:

Installs over Open Framing or Solid Substrate.

Information:

Exposed direct-fastened roof and wall panel.

Testing & Approvals:

UL 263 Fire Resistance Rating


UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

ASTM E 455 Diaphragm Test

2020 FBC Approved

DL-3 PANEL

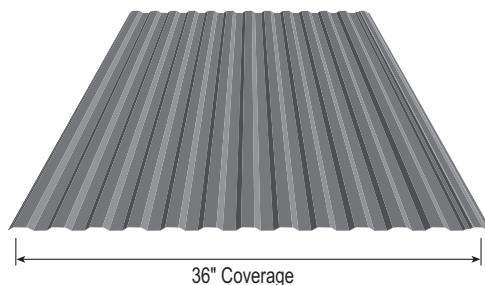

GENERAL INFORMATION

Minimum Slope: 3:12

Substructure:

Installs over Open Framing or Solid Substrate.

Panel Lengths:

3'-0" minimum up to 45'-0" maximum

Information:

Exposed direct-fastened radius roof panel.

Testing & Approvals:

UL 263 Fire Resistance Rating

UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

Other panel profiles are available. Please contact your local branch for more information.

metalsales.us.com

MS Metal Sales™

1435 Egret Avenue • Detroit Lakes, MN 56501

888.594.1394 Toll Free • 218.847.2988 Phone • 218.847.4835 Fax

29 GAUGE

MS(18R-29) 1324 / 11/2022