

# 2-3/8" T-ARMOR

Condensed  
Technical  
Reference




Flat



Pencil Rib




Mesa



Plank



Minor Rib



Striated

\*Profiles are shown for 16" wide panels. Other width panels are similar.

ARCHITECTURAL  
COMMERCIAL  
INDUSTRIAL  
PANEL

CONCEALED  
FASTENED

12", 16" OR 18"  
COVERAGE

MINIMUM  
SLOPE  
1/2:12


OPEN FRAMING OR  
SOLID SUBSTRATE

## PANEL OVERVIEW

- ▶ Finishes: PVDF and Acrylic-Coated Galvalume®
- ▶ Corrosion Protection: AZ55 per ASTM A 792 for unpainted Galvalume®  
AZ50 per ASTM A 792 for painted Galvalume®  
G90 per ASTM A 653 for Galvanized
- ▶ Thickness: 24 ga and 22 ga
- ▶ 12", 16" or 18" panel coverage, 2 3/8" rib height
- ▶ Panel Length: Minimum: 6', Maximum: 80'
- ▶ Architectural, structural vertical rib standing seam roof system
- ▶ Integral mechanically seamed side lap with factory-applied sealant
- ▶ Minimum roof slope: 1/2:12
- ▶ Accommodates 1/2" to 6" blanket insulation

## TESTING AND APPROVALS

- ▶ UL 2218 Impact Resistance - Class 4
- ▶ UL 790 Fire Resistance Rating - Class A, per building code
- ▶ UL 263 Fire Resistance Rating - per assembly
- ▶ ASTM E 1680 Air Leakage
- ▶ ASTM E 1646 Water Penetration - None
- ▶ ASTM E 2140 Water penetration, Static Head
- ▶ ASTM E 1592 Structural Performance
- ▶ UL 580 Uplift Resistance - Class 90 Constructions: #268, #268A and #268B
- ▶ ICC Evaluation Report - ESR-3743

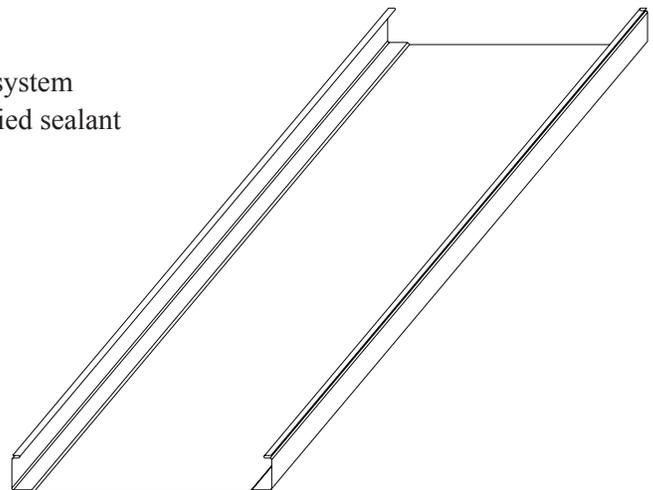


**MS Metal Sales**™

# 2-3/8" T-ARMOR

**Condensed  
Technical  
Reference**

## ATTACHMENT DETAILS

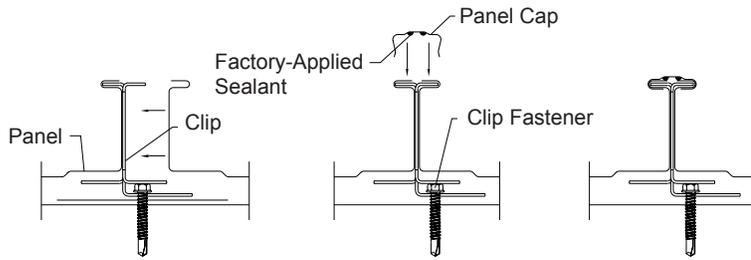


INSTALLING PANEL


INSTALLING CAP

SEAMED

## CLIP OPTIONS

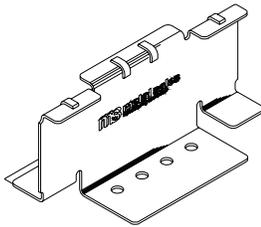

INDIVIDUAL CLIP

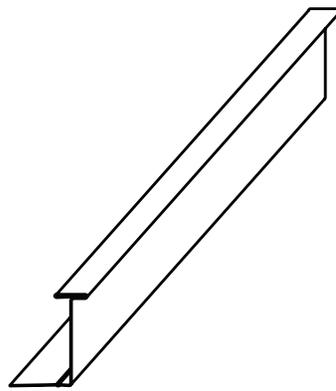

CONTINUOUS CLIP

## FASTENING INFORMATION

### ► Clips

Clip spacing is based upon the design loads, the spanning capacity of the panels, the fasteners and the support members.

Individual clips are 0.060" thick, G90 is standard, 410 stainless is optional. Continuous clips are 24 or 22 ga.

Both Individual and continuous clips can accommodate practically unlimited thermal movement in each direction.

### ► Fasteners

Overdriven fasteners will cause panel distortions.

Fasteners should extend 1/2" or more past the inside face of the support material.

#### Clip Fasteners:

Attaching to Wood:

#12-11 x 1-1/2" Wood Screw

Attaching to Steel:

<18 ga: 1/4"-14 Deck Screw

>=18 ga, <=12 ga: 1/4"-14 Driller, No Washer

>12 ga: 1/4"-24 Driller, No Washer

#### Exposed End Fasteners:

At Eave Plate or Back-Up Channel:

#12-14 XL Driller

#### Concealed End Fasteners:

At Eave Plate or Back-Up Channel:

#12-14 Driller, No Washer

#### Trim Fasteners:

1/4"-14 x 7/8" XL Stitch Screw

1/8" x 3/16" Pop Rivet

## STEEL SECTION PROPERTIES

Ga	Width in	Yield ksi	Weight psf	Top In Compression		Bottom In Compression	
				Ixx in <sup>4</sup> /ft	Sxx in <sup>3</sup> /ft	Ixx in <sup>4</sup> /ft	Sxx in <sup>3</sup> /ft
24	12	50	1.50	0.3398	0.2053	0.2078	0.1758
22	12	50	1.97	0.4640	0.2806	0.3020	0.2466
24	16	50	1.35	0.2828	0.1601	0.1260	0.0944
22	16	50	1.78	0.3810	0.2157	0.1800	0.1397
24	18	50	1.30	0.2567	0.1419	0.1113	0.0836
22	18	50	1.71	0.3507	0.1932	0.1600	0.1242

## ALLOWABLE UNIFORM LOADS, psf (3 or More Equal Spans)

Inward Load						Outward Load					
2'	2.5'	3'	3.5'	4'	5'	2'	2.5'	3'	3.5'	4'	5'
400	400	362	280	222	149	119	108	96	85	73	50
400	400	400	400	326	216	119	108	98	87	76	55
400	295	215	163	127	84	88	80	73	66	59	44
400	400	328	247	192	126	109	100	91	82	73	55
377	261	190	144	113	74	68	62	56	50	44	32
400	400	292	220	171	112	87	80	74	67	61	47

- Theoretical section properties have been calculated per AISI 2016 'North American Specification for the Design of Cold-Formed Steel Structural Members'. Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2016 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers the 3 or more equal spans condition. Allowable load does not address web crippling, fasteners, support material or load testing. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase for wind.

**MS Metal Sales™**

Anchorage, AK 866.640.7663  
Bay City, MI 888.777.7640  
Deer Lake, PA 800.544.2577  
Denver, CO 800.289.7663

Detroit Lakes, MN 888.594.1394  
Fontana, CA 800.782.7953  
Fort Smith, AR 877.452.3915  
Independence, MO 800.747.0012

[metalsales.us.com](http://metalsales.us.com)

Jacksonville, FL 800.394.4419  
Kelso, WA 800.431.3470  
Rock Island, IL 800.747.1206  
Rogers, MN 800.328.9316

Sellersburg, IN 800.999.7777  
Sioux Falls, SD 888.299.0024  
Spokane, WA 800.572.6565  
Temple, TX 800.543.4415  
Woodland, CA 800.759.6019