
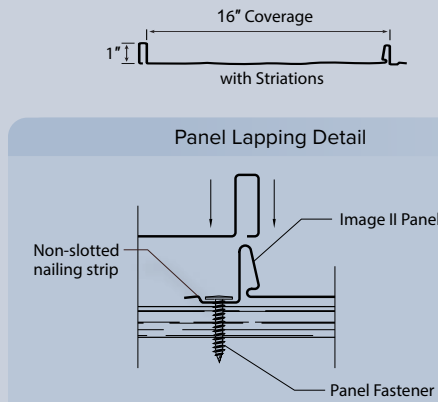


Panel Profiles

Image II™

26 ga. 25444xx


- Concealed fastened system
- Minimum slope 3:12
- 26 gauge standard
- Applies over solid substrate with 30# felt underlayment
- Low maintenance
- Easy installation
- Full line of trims and accessories
- Highly resistant to wind, hail, snow and rain
- Mildew resistant and will not rot or absorb water



Standard Flashings and Trims


13" Step Ridge/Hip

26 ga. 55974xx




Step Ridge/Hip

26 ga. 55947xx



Extended Eave

26 ga. 55073xx



4" Eave

26 ga. 55065xx





Image II W Valley

26 ga. 55018xx



Peak

26 ga. 55022xx




Image II Rake

26 ga. 55951xx






Image II Step Rakewall

26 ga. 55957xx

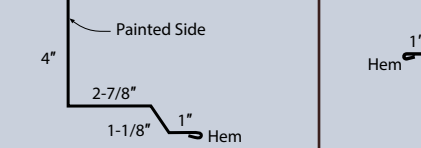


Step Rake

26 ga. 55954xx




Pitch Break

26 ga. 55048xx




Prow Flashing

26 ga. (custom item)



"Z" Closure



26 ga. 55946xx



Pro-Panel II®

29 ga. 22908xx 26 ga. 25113xx

- Exposed fastened system
- Trapezoidal rib
- Minimum slope 3:12
- 29 & 26" gauge





*26 gauge extended lead time

Classic Rib®

29 ga. 22934xx 26 ga. 25114xx

- Exposed fastened system
- Bell top trapezoidal rib
- Minimum slope 3:12
- 29 & 26" gauge





*26 gauge extended lead time

2.5" Corrugated

29 ga. 22920xx



- Exposed fastened system
- 21-1/3" roof coverage
- Minimum slope 3:12
- 1/2" rib height
- 29 gauge standard

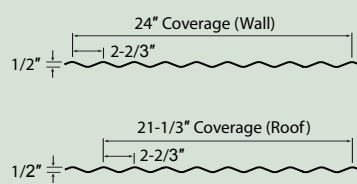

PBR-Panel


26 ga. 25052xx

- Exposed fastened system
- Flat top trapezoidal rib
- Minimum slope 1:12
- 36" Panel coverage
- 26 gauge standard

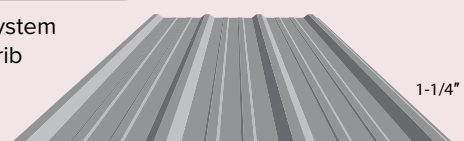


Universal Ridge

29 ga. 42023xx




Vented Ridge

29 ga. 51300xx




Full Gable

29 ga. 42365xx




Full Eave

29 ga. 42368xx




Mini Gable

29 ga. 42211xx




Mini Eave

29 ga. 42199xx




Outside Corner

29 ga. 42163xx




Inside Corner

29 ga. 42063xx



Universal Sidewall

29 ga. 42367xx




Universal Endwall

29 ga. 42366xx




L Base Trim

29 ga. 42364xx




Prow Flashing

29 ga. 42670xx




Wall Lite Flashing

29 ga. 42900xx




Pitch Break

29 ga. 42943xx




J Channel

29 ga. 42274xx




Style D Trim

29 ga. 42370xx




W Valley

29 ga. 42079xx




Snowguard

29 ga. 68617xx




Peak Flashing

29 ga. 42675xx




Universal Flashing

29 ga. 42076xx




Post Trim

29 ga. 5-1/2" 42068xx
7-1/4" 42069xx
9-1/4" 42070xx




Jamb Trim

29 ga. 5-5/8" 42481xx
7-3/8" 42041xx
9-3/8" 42042xx



Rat Guard

29 ga. 42265xx




Skylite Flashing

29 ga. 42668xx




Universal Ridge

26 ga. 55010xx




20" Ridge/Hip

26 ga. 55006xx




PBR Gable

26 ga. 55196xx




PBR Eave

26 ga. 55069xx




PBR Jamb/J Trim

26 ga. 55208xx




CIA Base

26 ga. 55139xx




Formed Ridge Cap

26 ga. 55921xx




Head Channel

26 ga. 55122xx




W Valley

26 ga. 53018xx




Peak Trim

26 ga. 55022xx




Inside Corner

26 ga. 55214xx



Outside Corner

26 ga. 55219xx




Exposed Fastener Placement

Pro-Panel II®



2.5" Corrugated

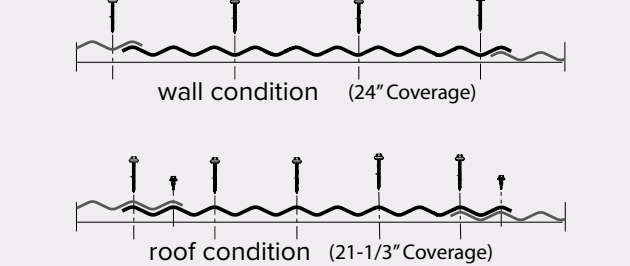


End fastening patterns

Classic Rib®



PBR-Panel



Accessories

#14 Metal Woodscrew
Fasten to plywood/OSB



#12 TEK/Self Driller
Fasten panel to steel framing



#10 Woodgrip
Fasten to dimensional lumber



#14 Stitch TEK
Fasten panel sidelaps and trims (26 ga.)



[LowPro]2 Metal
Fasten panel sidewalls (12 ga.)



Hip/Valley Closure
1" x 3/4" x 19'-0"
1-1/2" x 3/4" x 13'-0"



#12 x 3/4" Stitch Screw
Fasten sidelaps and trims (29 ga.)



Profile Vent LP2 Closure
Available for Pro-Panel II,
Classic Rib, Delta Rib, Image II, PBR Panel




#8 x 1" Truss Head
For use with Image II™
Fasten to plywood/OSB




All flat metal surfaces can display waviness commonly referred to as "oil canning". This is an inherent characteristic of steel products, not a defect, and therefore is not a cause for panel rejection.

Trim Locator

Exposed Fastener/Multi-Purpose Trims

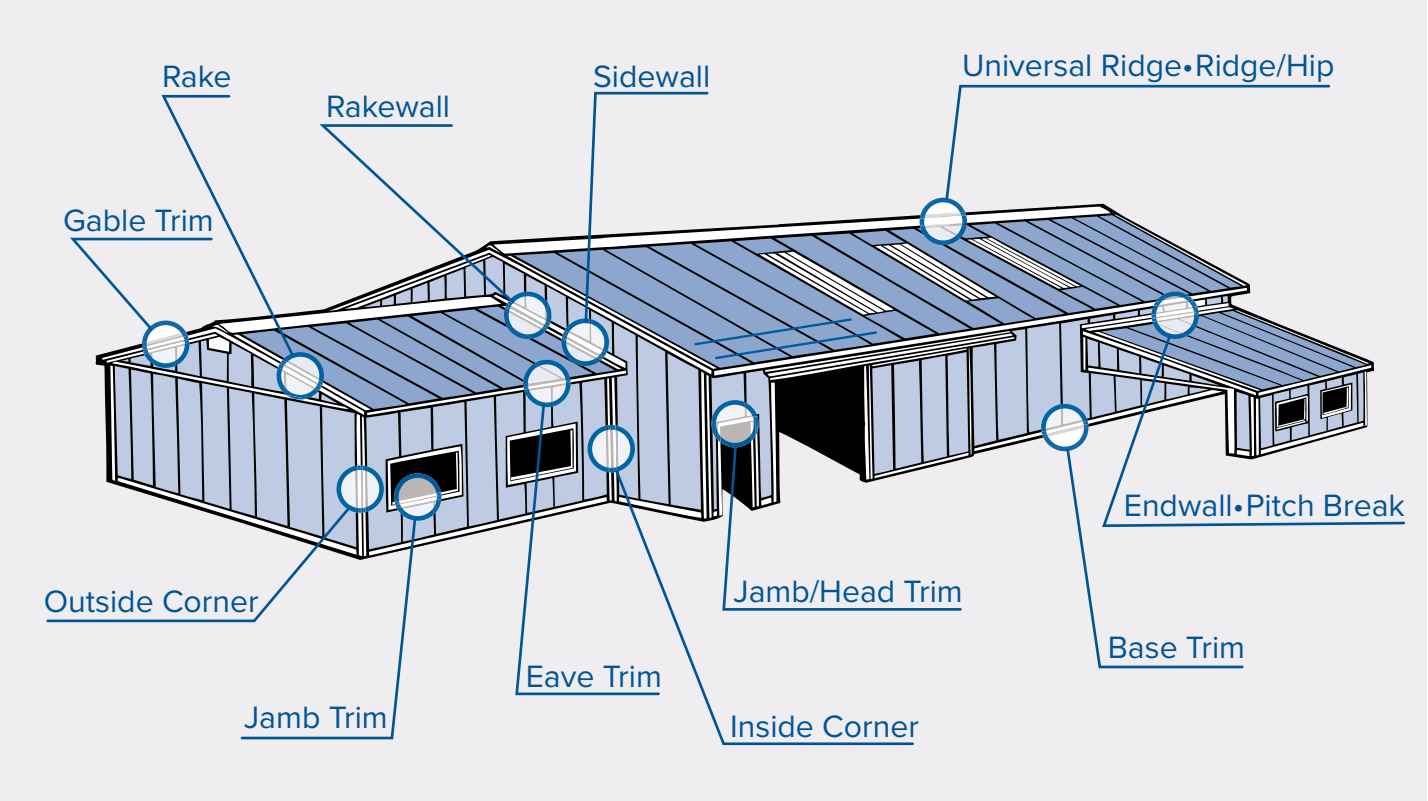

Concealed Fastener Trims

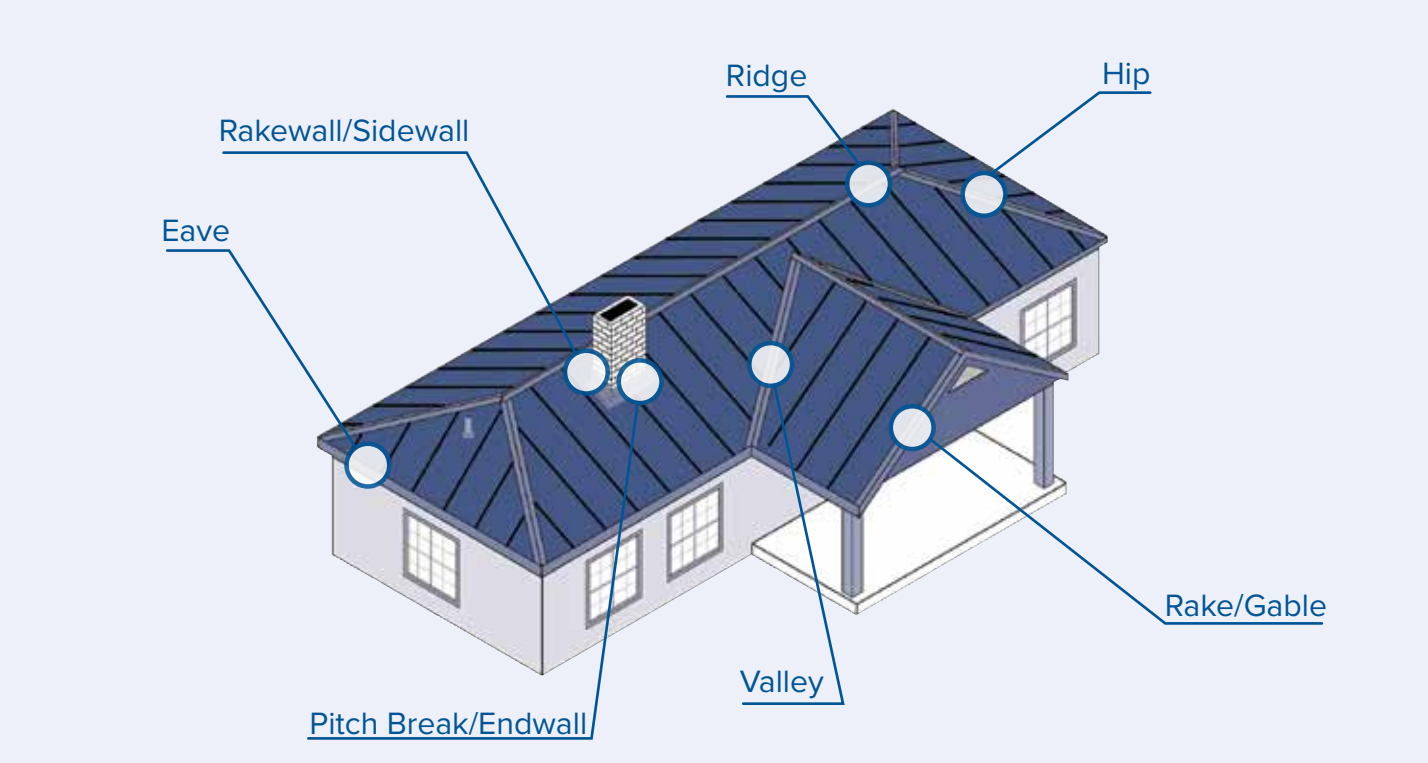

Color Guide

29 & 26 Gauge Colors

Polar White (80)	White (30)	Light Stone (63)	Mocha Tan (22)	Taupe (74)
Brown (12)	Dark Brown (44)	Burnished Slate (49)	Ash Grey (25)	Zinc Grey (29)
Charcoal (17)	Black (06)	Matte Black (106)	Forest Green (26)	Ocean Blue (35)
Red (24)	Patriot Red (73) ² Premium Color	Native Copper (190) Premium Color	Galvalume® (41)	

PANEL
AND
FLASHING
GUIDE



Representation of colors will vary due to printing limitations. Color Charts and Sample Color Chips are available upon request.

MS Metal Sales

2727 East Trent Avenue • Spokane, WA 99202 • 509.536.6000 • 800.572.6565

metalsales.us.com

©MS1253 7/26

MS Metal Sales

DEMAND QUALITY. DEMAND METAL SALES.

metalsales.us.com